PDA/Smartphone Viewer

MPEG-4 and M-JPEG Video Viewer.

1. Copy IPCamconfig.txt and viewer.exe to Mobile device.
2. Run viewer.exe on mobile device.

3. The interface when logo in.

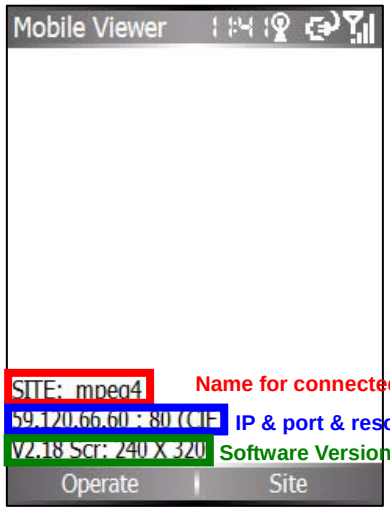

Name for connected site

IP & port & resolution

Software Version & screen resolution

4. /Site/Manage/New to create New Site

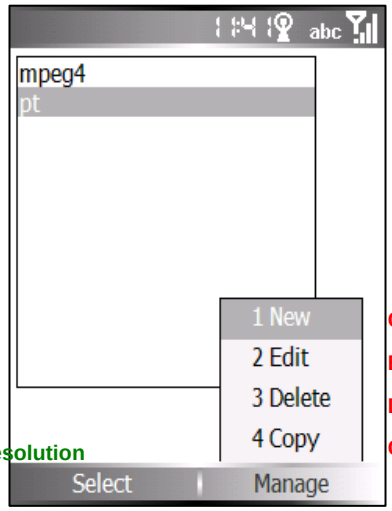

Create a new site

Edit a saved site

Delete a saved site

Copy a saved site

5. Input Name, IP, Port, Account, Password and Video Size. Then press OK.

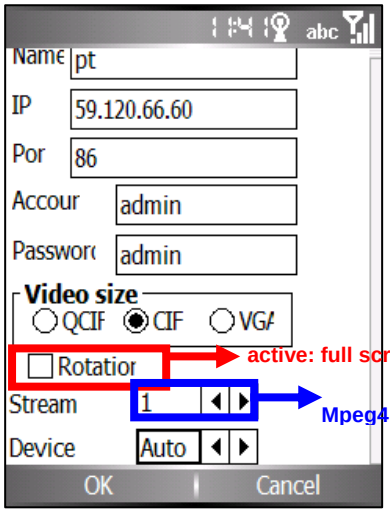

active: full screen

Mpeg4 DVR: change channel

6. Site is created.

Press /Select/ button to view.

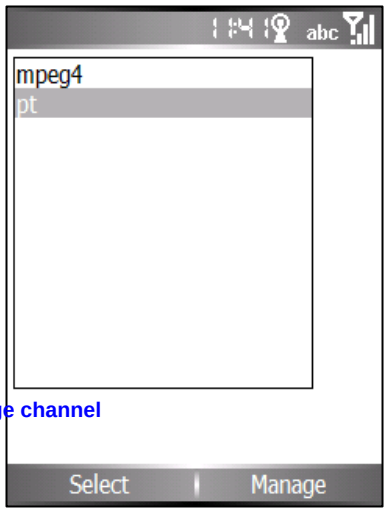

DDNS NOTED

If use the DDNS2.YDSDVR.COM, the PORT should be 80.

5.1 Rotator: Rotate images in full screen.

5.2 Stream: Support MPEG4 multi stream videos.

Stream num: Default: stream 1 for SINGLE stream models or MULTI streams use stream 1.
In DVR: Stream 1 for CH 1, 2 for CH2, 3 for CH3 and 4 for CH4 and so on.

5.3 Device: Identify type of network card Unknown status -8: device type is mismatched.

Auto: Automatically 1: MPEG-4 2: M-JPEG 3: AXIS Models 4: MPEG-4(SD card) 5. RTSP(No Audio)

7. /Operate/

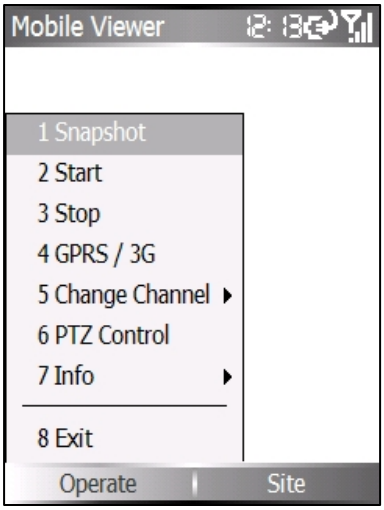

1. **Snapshot: Capture still images**
2. **Start: Start connecting**
3. **Stop: Stop connecting**
4. **GPRS / 3G: Use GPRS/3G to connect.**

   Please setup the account firstly in mobile device.
5. **Change Channel: DVR CARD Only.**
6. **PTZ control:**

   <: Move Left >: Move Right

   ^: Move Up V: Move Down

   ZI: Zoom In ZO: Zoom Out

   IO1: IO1 control IO2: IO2 control



7. **Info: Video Stream information**
8. **Exit: Exit Viewer Program**

8. /Operate/Change DVR Channel (M-JPEG DVR)

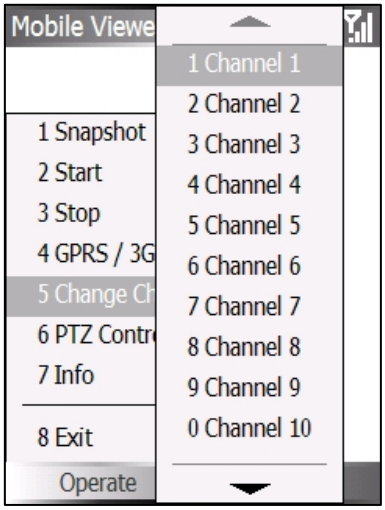

M-JPEG DVR CHANNEL SWITCH

(MPEG-4 DVR)

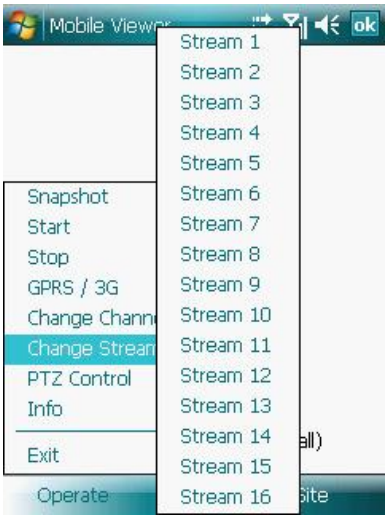

MPEG-4 DVR CHANNEL SWITCH
Stream1: switch to channel 1
Stream2: switch to channel 2

Stream16: switch to channel 16

9. /Operate/Info: Show or Hide text data

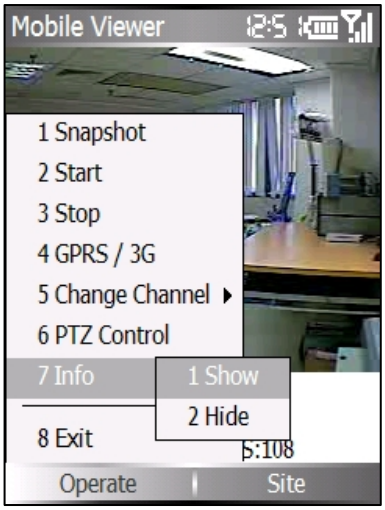

PDA/Smartphone Supported Devices:

PDA based on Microsoft Windows:

1. HP HW6515/HX2200/HX4700/1510/H6365/RZ1700/RX3417/1940 (OS: PPC2003SE/WM5)
2. ASUS A716/ A620BT/ A620/A730/P535 (OS: PPC2003SE/WM5/WM6)
5. Dopod 838/838pro/D810/P800W/U1000/C800/M700/818Pro/828 (OS: WM5/WM6)

Microsoft Mobile Smart Phone:

1. DOPOD 565/575/585, Orange SPV C500, Motorola MPX220/i930, SPV C600, T-Mobile SDA, Cingular 2125 (OS: 2003SE)
2. DOPOD 577W/586W/S300/595/720W/TOUCH (OS: WM5/WM6)
3. ASUS P525/526/535/P735 (OS: WM5/WM6)

Q&A:

Q. IPCAM_VIDEO_GETFRAME_IS_ERR

A. 3G/GPRS connection is not stable or not accessible. **High speed moving or signal is not strong will cause it.**

Q. Unknown status -8

A. Settings of **device type is mismatched.**

Q. IPCAM_IS_UNCONNECTED

A. 3G/GPRS connection is not stable or not accessible. **Please restart 3G/GPRS connection.**